




Automatic Glue Dispensing Chip Mounter Machine Concentric Screw Valve Syringe

Our Product Introduction

for more products please visit us on mingseal-en.com

Basic Information

- Place of Origin: China
- Brand Name: MingSeal
- Certification: ISO CE
- Model Number: KSV1000
- Minimum Order Quantity: 1
- Price: \$1-\$10000
- Packaging Details: WOODEN
- Delivery Time: 5-60 days
- Payment Terms: L/C, T/T, D/A, D/P, MoneyGram, Western Union

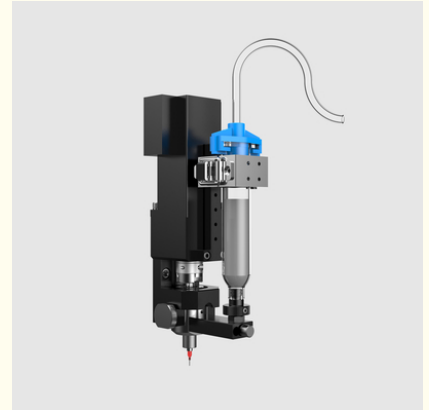

Product Specification

- Condition: New
- Type: KSC1000
- Automatic Grade: Automatic
- Weight: 1kg
- Dimension(l*w*h): 37×230×85mm(W X H X D)
- Certification: CE Certificate,ISO,CE/ISO
- After-sales Service Provided: Engineers Available To Service Machinery Overseas,Online Support,Video Technical Support,No Overseas Service Provided,Free Spare Parts
- Warranty: One Year
- Max. Flow Rate: 110mg/s (8P Screw)
- Fluid Outlet: Luer Female(U-type Valve Body)
- Fluid Inlet: Luer Male
- Max. Operation Pressure: 600kPa (6bar)
- Viscosity Range: 50,000~500,000cps



More Images



Product Description

KSV1000 Concentric screw valve

KSV1000 series is a screw valve for quantitative conveying and dispensing of media containing particles and medium and high viscosity media. The valve body can be provided with screws of different specifications to cover applications with different flow and glue amount requirements. The valve body adopts a quick release design, which is convenient for quick cleaning and maintenance.

Features and Advantages

Syringe guide installation design, suitable for 10cc/30cc/50cc syringes, and quick replacement.

Extremely wear-resistant screw which is made of tungsten steel.

Ability to process most of low, medium and high viscosity glues.

Closed-loop servo motor to achieve precise positioning and fault detection.

Processable Fluids

Solder Paste UV Thermosetting Adhesive Thermal Grease Thermal Gel

Application Fields


Camera AA Process Dispensing

MEMS Solder Paste Dispensing

Thermal Conductive Coating for Semiconductor


Lens Bonding

Dimensions

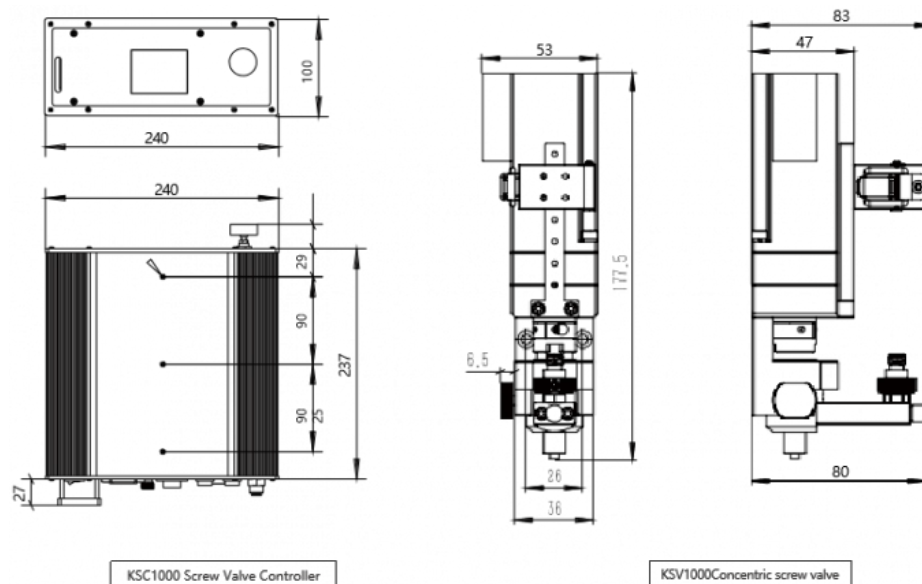

Technical Specifications

Model	KSV1000 Concentric screw valve	
Max. Flow Rate	110mg/s (8P Screw) 50mg/s(16P Screw)	
Fluid Outlet	Luer Female(U-type valve body)	Flat lock(T-type valve body)
Fluid Inlet	Luer Male	
Max. Operation Pressure	600kPa (6bar)	
Viscosity range	50,000~500,000cps	
Electric Drive	AC Servo motor	
Stator material	Stainless steel	
Screw material	Tungsten steel	
Operating temperature	10°C~40°C	
Dimension(cables excluded)	37×230×85mm(W x H x D)	
Weight (syringe&glue excluded)	1kg	

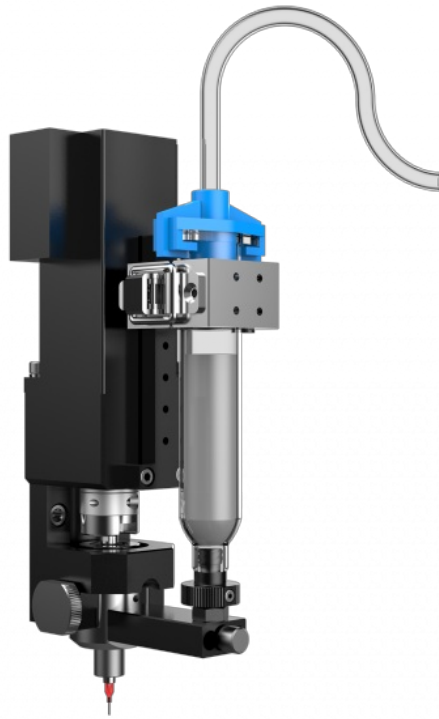

Mingseal INTELLIGENT & EFFICIENT **Changzhou Mingseal Robot Technology Co., Ltd.**



008613776880183



market01@mingseal.com



mingseal-en.com

No. 18-98, Changwu Middle Road, Wujin District, Changzhou City, Jiangsu Province