

PJS-100 Series Piezoelectric Jetting Valve Acoustics Semiconductor Optics Automotive Electronics New Energy Battery

Our Product Introduction

for more products please visit us on mingseal-en.com


Basic Information

- Place of Origin: China
- Brand Name: MingSeal
- Certification: ISO
- Model Number: PJS-100H
- Minimum Order Quantity: 1
- Price: \$1-\$1000
- Packaging Details: WOODEN
- Delivery Time: 5-60 days
- Payment Terms: L/C, T/T, D/A, D/P, MoneyGram, Western Union




Product Specification

- Condition: New
- Type: PJS-100H Piezoelectric Jetting Valve
- After-sales Service Provided: Engineers Available To Service Machinery Overseas, Video Technical Support, Online Support, Field Installation, commissioning And Training
- Product Name: PJS-100 Series Piezoelectric Jetting Valve
- Highlight: Electronic smt pick and place equipment, Semiconductor smt pick and place equipment, Semiconductor automatic smt pick and place machine

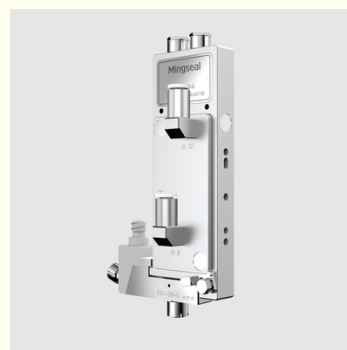

More Images



Product Description

PJS-100 Series Piezoelectric Jetting Valve

This series of piezoelectric jetting valve is a non-contact jetting system of high speed and precision which can process low, medium, high and ultra-high viscosity fluid; according to product features, there are two valve bodies to choose from, including PJS-100A with modular design, PJS-100H with quick dis-assembly and quick-change function of flow channel, and other derivative models used in specific working conditions.

Combined with piezoelectric valve controller and temperature controller, it can be widely used in noncontact high-precision spraying operations in the fields of advanced semiconductor manufacturing

Our Product

and mobile electronic device packaging.

Features and Advantages

- ◆ Minimal dosing amount 0.5nl,thinnest line width 0.2mm
- ◆ High amount stability with deviation under $\pm 2\%$
- ◆ Processable fluid viscosity range 0-200000cps
- ◆ Excellent control of glue scattering under 0.5% and great management of bubble.

Processable Fluids

Type	PJS-100A Piezoelectric Jotting Valve	PJS-100H Piezoelectric Jotting Valve
Supply Pressure Range	0.1~8bar	0.1~8Bar
viscosity Range	Medium and high viscosity up to 200000mpas	Medium and high viscosity up to 350000mpss
Minimal Dot Diameter	0.02mm(rlated to adheshe)	0.15mm (ralated to adheshe)
Minimal Line Width	0.25mm(rlated to adhesive)	0.17mm (ralated to adhesve)
Minimal Dosing Amount	0.5nL(CPK>1337	0.5nL(CPK>133)
Amount Accuracy	$\pm 1\%$ (ralntst to acheswe)	$\pm 1\%$ ralatod to adheshe)
Control Mode	000HE	1000He
Corrosion Resistance	All water-based glue,organic solvents,weak acids and alkali	All water based glue,organic solvents,weak acids and alkali
Dimensions(W*D*H)	119×75×15mm(runner assembled,thermal connectors excluded?)	123×75×15mm(runner assembled,thermal connectors excluded)
Weight	420g(runner assembled)	440g(runner assembled)
Working Temp. Range	0~40c	10~50°C
Main Functions		Rapid disassembly of tap and runner
Types	PJC-100A Controller	PJC-100H Controller
Usage Param, and min. step	0.01-1000.00ms,0.01ms	0.01-1000.00ms,0.01ms
Dispensing Frequency	1-1000HZ	1-1000HZ
Display	TTT t i T	TETcnu iT
Parameter Setting	10 sets	10 sets
Reserved Interface	Supporting 5TD,R5232/R5485 MODBUS RTU agreement	Supporting 5TD R5232/R5485 MODBUS RTU agreement
Dimensions (W*D*H)	5×187×287mm	270×160×220mm
Weight	3kg	4kg
Rated Power	215W	275W
AC Input	AC 220V $\pm 20\%$	AC220V $\pm 20\%$
Main Functions		Valve body temperature monitoring and alarm function;;error output heating status output;controller status output





Mingseal Changzhou Mingseal Robot Technology Co., Ltd.
INTELLIGENT & EFFICIENT

☎ 008613776880183 ✉ market01@mingseal.com 🌐 mingseal-en.com

No. 18-98, Changwu Middle Road, Wujin District, Changzhou City, Jiangsu Province